

ACCELERATOR COMPLEX FOR THE JOINT PROJECT OF JAERI/NSP AND KEK/JHF

Y. Yamazaki, M. Mizumoto, and JAERI/KEK Joint Accelerator Team
KEK, High Energy Accelerator Research Organization
1-1 Oho, Tsukuba-shi, Ibaraki-ken, 305-0801, Japan
JAERI, Japan Atomic Energy Research Institute
Tokai-mura, Naka-gun, Ibaraki-ken, 319-1195, Japan

Abstract

The NSP of JAERI and JHF of KEK were brought into one joint project, making it more promising to efficiently promote a wide range of scientific and engineering fields based upon high-power proton accelerators. The Phase I of the Joint Project comprises a 600-MeV linac, a 3-GeV, 1-MW rapid-cycling synchrotron and a 50-GeV synchrotron. The accelerator complex implies upgradability to a several-MW pulsed spallation neutron source to be realized in the Phase II. New and specific features are based upon the R&D results accomplished for the Joint Project, including a superconducting linac to accelerate the beam from 400 MeV to 600 MeV. The Joint Project thus includes one of the most crucial accelerator techniques for realizing an accelerator-driven nuclear waste transmutation system.

1 Introduction

The Neutron Science Project (NSP) [1-3] of Japan Atomic Energy Research Institute (JAERI) and the Japan Hadron Facility (JHF) Project [4-10] of High Energy Accelerator Research Organization (KEK) were joined to form one project. Both projects can be characterized by a single key word "high-power proton accelerators." This will intensively promote a wide variety of science and engineering requiring high-power proton accelerators.

The NSP accelerator complex would comprise a 1.5-GeV proton linac and storage rings (SR's) [1-3]. The NSP has evolved from the high-power proton project, originally proposed for the accelerator-driven nuclear waste transmutation system (ADS) as one of the nuclear energy project OMEGA [11,12]. It has gradually been shifted to science using a pulsed spallation neutron source by including the SR's. The fast-extracted beam from them would be used for the pulsed spallation neutron experiment, while the beam from the linac for the ADS. Since the ADS ultimately requires CW operation, the linac should be compatible with both CW operation and pulse operation. A superconducting (SC) linac is a natural choice for CW operation [13,14]. Since the ADS is also making use of spallation neutrons, this project is referred to as the "Neutron Science Project". In this way the NSP would include nuclear energy application.

The JHF accelerator complex would comprise a 50-GeV main synchrotron, a 3-GeV rapid-cycling synchrotron (RCS), and a 200-MeV linac [4-10]. The 50-GeV beam would be slowly extracted for both fundamental particle physics and nuclear physics, such as Kaon rare decay and hypernuclei spectroscopy. It would be also fast extracted for a long-baseline tau-neutrino appearance experiment. The 3-GeV beam is to be fast-extracted to three experimental

areas: a pulsed spallation-neutron experimental area, a muon experimental area, and an exotic nuclei experimental area. In this way the JHF project would cover fundamental particle physics, nuclear physics, materials science, life science, and others. The project has been promoted by the related scientific communities as a first-priority project.

Both the NSP and JHF project have one common feature, that is, inclusion of pulsed spallation neutron source. The former is ambitiously aiming at an extremely high power of up to 5 MW, while the latter is of rather moderate power (0.6 MW). The neutron-science community has assigned the latter as the present, most urgent project, considering the former as a future one. Meanwhile, JHF was slightly modified in order to assure a future upgrade to a 1-MW class machine. On the other hand, the 5-MW neutron source requires intensive development. In this way, we consider it ideal to properly join the two projects from both the viewpoints of the usage and developments of high-power proton accelerators.

The Joint Project now covers both basic science and the engineering, that is, nuclear-energy applications. This is the natural result of the recent widening of the application fields of the high-power proton accelerators.

In the following section, we discuss the accelerator scheme of the Joint Project and our strategy for developing and realizing extremely high-power proton accelerators. Then, the research and development work will be presented, as has been done for the NSP and JHF, and will be elucidated from the new viewpoint of a Joint Project. In particular, we will show how the innovative results of the R&D have influenced us in order to formulate the above-mentioned strategy.

2 ACCELERATOR SCHEME

The accelerator complex of the Joint Project will be built at the Tokai site of JAERI, shown in Fig. 1. The project is divided into two phases. Phase I includes:

- 1) a 50-GeV main synchrotron with an average current of 15 μ A and a repetition rate of 0.3 Hz,
- 2) a 3-GeV RCS with an average current of 333 μ A and a repetition rate of 25 Hz, and
- 3) a 600-MeV proton linac with a peak current of 50 mA, a pulse length of 500 μ s, and a repetition of 25 Hz.

The 400-MeV part of the linac will use a normal-conducting (NC) cavities. The 400-MeV beam thus accelerated will be injected to the RCS. The superconducting (SC) cavities will be utilized for the acceleration from 400 MeV to 600 MeV. The 600-MeV, long-pulse beam is directly transported to the ADS experimental area. The SC proton linac can be a prototype of the future CW accelerator for ADS use. The development

work has been performed at JAERI [8-10] in collaboration with the SC linear collider group at KEK [15] as described in Sec. 3.3. In this way, the ADS technology will be steadily developed regarding both the target side and the accelerator side. After the beam quality from the SC linac is sufficiently improved for the injection to the ring, the injection of the 600-MeV beam will become one of possible options for the upgrade as will be discussed later.

Both the RCS and linac should be upgradable regarding their energy and intensity.

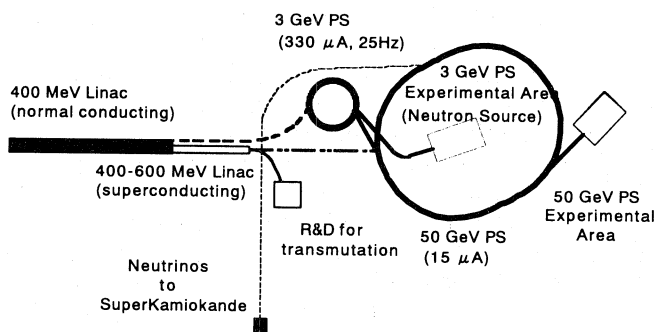


Fig. 1 Layout of the accelerator complex of the Joint Project.

The use of the main synchrotron is exactly the same as that in the JHF project. On the other hand, the 3-GeV, 1-MW beam will be provided to the pulsed spallation neutron experiment in the same way as both the NSP and JHF project. It will also be used for muon science, the production target for which is located upstream of the neutron source as well as that for exotic nuclei science.

Phase II of the Joint Project is of course the upgrade of the Phase I. One unique feature of the Joint Project is the high compatibility with various upgrade paths of the accelerator complex as follows. It is controversial which accelerator scheme is more realistic[13], the scheme of a full-energy linac with SR's or the RCS scheme, in order to achieve a several-MW pulsed neutron source. One of the major limiting factors on high-power proton accelerators is radioactivity arising from beam loss. In particular, beam loss is unavoidable, and most serious during the injection process to a ring, whether it is a SR or an RCS. Since the injection energy to the RCS is significantly lower than that

to the SR, the radioactivity can be lowered by approximately the ratio of the former injection energy to the latter one. In addition, since the accelerated beam energy of the RCS can be higher than that of the SR, we can lower the beam current of the RCS more than that of the SR with the same power, that is, approximately the same neutron yield. In this two-folding way, we can allow a higher beam loss rate in the RCS scheme than that in the SR scheme, assuming the same neutron flux and the same allowable radioactivity (approximately a factor of 7.5 in the Phase I). It is true that the SR's are more advantageous than RCS regarding many features. For example, the high-power RF system required for a high-energy RCS is much more complicated than that for a SR. The ceramics vacuum chamber with proper RF shields is necessary in order to suppress any effect of the eddy current which would be induced on the metallic chamber. The beam has to stay much longer. The large aperture is necessary in order to overcome the space charge limit. However, it should be noted that the recent innovative work done for the JHF-ring RF system [16-18] has significantly eased one of the major problems existing in the high-energy RCS, as detailed in Sec. 3.1. This kind of innovative work may change the pros and cons of competitive options. In any case, however, a beam study is indispensable in order to critically test which problems existing in the RCS scheme or the SR scheme are more serious.

The Phase-I machines will be fully utilized for this test. The several-GeV booster synchrotron is indispensable for the high-intensity several 10-GeV beams. This is one of the reasons why we are going to use the RCS for the Phase-I neutron source in contrast to the SNS project [19] and the ESS project [20]. If it turns out that the RCS scheme is more promising than the SR scheme, we will upgrade the Phase-I RCS to 6 GeV and will build one more 6-GeV RCS in order to provide a several-MW beam. In contrast, if the result is opposite, we will upgrade the linac to more than 1 GeV and will construct two or three SR's. Either path is possible, as seen from Fig. 1. The Phase-I linac will be constructed at a location where an energy upgrade is possible, if necessary. The upgrade paths conceived in the Joint Project are summarized in Table 1. The optimum may be in between the two extreme options as shown in the last line of the table.

Table 1. Upgrade Path of Linac and Rings

RCS or SR				Linac (56% chopping)				
Beam Power	Energy	Repetition	Number	Energy	Peak Current	Pulse Length	Repetition	Average Current a)
1.0 MW	3 GeV	25 Hz	1	400 MeV	50 mA	500 μs	25 Hz	333 μA
5.0 MW	6 GeV	25 Hz b)	2	400 MeV	63 mA	500 μs	50 Hz	833 μA c)
or								
5.0 MW	1 GeV	50 Hz	2 or 3	1 GeV	60 mA	3 ms	50 Hz	5 mA
or								
5.0 MW	4 GeV	25 Hz b)	2	600 MeV	60 mA	750 μs	50 Hz	1.26 mA c)

a) The average current is obtained by a product of the peak current, the pulse length, the repetition, and the chopping rate of 56%.

b) This repetition is for each RCS. On the neutron production target the repetition is 50 Hz.

c) The flat bottom of the RCS magnet power supply is lengthened.

Being logically independent of the pulsed spallation neutron science (not financially independent), further ADS development may require a higher linac energy. In that case, the linac energy will be upgraded in the same way as in the SR scheme for the neutron science. However, it should be here emphasized that the several-MW neutron source is too difficult to realize by any compromised scheme. It can only be realized for its own purpose.

Construction of the 60-MeV part of the linac was already started in KEK as the low-energy front of the 200-MeV linac [2,5,6] for the JHF project, which comprises a 3-MeV, 324-MHz RFQ linac, a 50-MeV, 324-MHz drift-tube linac (DTL), and a 200-MeV, 324-MHz Separated DTL (SDTL). The beam will be commissioned by the end of 2000. This part will be transported to the JAERI/Tokai site in order to fully use it for the Joint Project.

H^- ions produced in a volume-production-type ion source with a repetition rate of 25 Hz, a pulse length of 500 μ s, and a peak current of 53 mA, are accelerated up to 400 MeV by the NC linac. Then, the ions are injected to the RCS through a charge-exchange foil. The large acceptance in transverse phase space of the RCS is filled out by painting the beam transversely, to minimize the space-charge effect. Longitudinal painting is not intentionally done, but the sinusoidally varying magnetic fields of the RCS give rise to an effect similar to painting. The beam to be injected has already been chopped synchronously with 1.34-MHz RF acceleration in the ring in order to longitudinally accept all beams from the linac. In this way, we can avoid the beam loss which is inherent in adiabatic capture. Two buckets are thus filled out for 500 μ s.

The fields in the quadrupole magnets and bending magnets are to oscillate sinusoidally with a rapid cycle of 25 Hz. Each of the focusing quadrupoles, defocusing quadrupoles and bending magnets is to be driven through its own resonant network in order to maintain a greater number of adjustable knobs. The injection time of 500 μ s is to be limited by the approximately flat bottom of the 25-Hz sinusoidal function. In each cycle the ring will accelerate 8×10^{13} protons.

The two bunches thus accelerated by the rapid-cycling magnetic fields are injected four times to the 50-GeV synchrotron, in which eight bunches are accelerated (3.2×10^{14} ppp). Two buckets are left empty to allow the fast-extraction kickers to turn on during the time thus opened. After the 0.12-s injection the beam energy is to be ramped up to 50 GeV for 1.9 s, and then the beam will be slowly extracted during a time of 0.7 s. The ramping cycle is to be completed in 3.42 s, including the falling time of 0.7 s.

3 R & D RESULTS FOR THE JOINT PROJECT

The R&D programs were formed for the NSP and JHF project in order to overcome various difficulties associated with their high-intensity character. The results so far accomplished are highlighted below.

3.1 Accelerating cavities loaded with magnet alloy

It has been seen that the RCS for the joint project is characterized by a challengingly high energy and rapid

cycling, even for Phase I. The rapid acceleration required for this option is very difficult to obtain by using the conventional ferrite-loaded cavities, in particular under the heavy beam loading. Although the ferrite material has been widely used for proton synchrotrons, because of its excellent permeability and tunability, it is still suffering from the following difficulties:

- 1) Since its saturation field is rather low, its μQ_f value, which is proportional to the shunt impedance, rapidly decreases as the operating magnetic field (thus, the field gradient) is increased. Together with its rather low Curie temperature (typically 100°C to 200°C), the highest-possible field gradient is limited to approximately 20 kV/m.
- 2) In order to tune a ferrite-loaded cavity by adjusting its permeability, it is necessary to supply the DC magnetic field on the ferrite through a bias circuit. The resulting complicated RF system viewed from the beams makes it difficult to analyze in order to overcome heavy beam-loading problems. Even worse, the response to the bias current is sometimes too slow for rapid cycling.
- 3) The high Q value, typically around a few ten, gives rise to coupled-bunch instabilities, which should be cured for high-current operation.

In particular, the problem 1) is most serious, as can be understood by attempting a lattice design for the high-energy RCS. Many long straight sections have to be prepared for the rapid acceleration, thus increasing the machine cost significantly.

Magnetic alloys (MA's) for example, FINEMET, appear to be very promising to simultaneously solve the above-mentioned problems [16-18]. The μQ_f value of MA's is almost constant throughout the wide range of the magnetic field values in contrast to that of ferrites. Together with its high Curie temperature (typically of 570°C) and easy-cooling taping structure, the former appears to be so promising for obtaining a high field gradient. Furthermore, in spite of its high μQ_f value, the Q value is extremely low, typically around unity. Consequently, no tuning is necessary for the MA-loaded cavities.

In order to demonstrate the real usefulness of the MA-loaded cavities, they have been power-tested [16] and beam-tested by electron beams [16]. One of the prototypes was actually used for beam acceleration in the HIMAC synchrotron [16,17]. The other cavity loaded with water-cooled MA plates was powered up to 50 kV/m [16], which is several times as high as the conventional ferrite-loaded cavity. The tested field gradient was limited by the RF power rather than the MA performance.

The extremely low Q value of an MA-loaded cavity makes it ideal for the barrier-bucket application. Another prototype cavity was shipped, and installed to the BNL/AGS under the Japan/US high-energy physics collaboration program. The barrier bucket was generated in the AGS together with the BNL cavity [18]. The beam-loading compensation has been easily done by the one-turn feed-forward method [16], since the cavity is like a pure resistance rather than the resonant circuit.

On the basis of the above empirical test results, we decided to use MA-loaded cavities for both the RCS and main synchrotron. It is noted that they can be used not only for acceleration, but also for barrier-bucket generation and for second-harmonic cavities. The latter two applications

will greatly ease both the space-charge problem and longitudinal instability by improving the bunching factor.

3.2 Low- and Medium-Energy Linac

These days it becomes common to use an RFQ with a rather high energy. This trend was initiated by the 3-MeV, 432-MHz RFQ linac [21], which was realized by inventing the π -mode stabilizing loop (PISL) [22]. This RFQ successfully accelerated a H⁺ beam of 13 mA peak [21].

In contrast to the medium duty of a few percent for the JHF, the very high duty of a few ten percent was a main challenge of the R&D program for the NSP. The 2-MeV, 200-MHz RFQ linac was tested for a proton peak current of 70 mA with a duty factor of 10% (a beam pulse length of 1 ms and a repetition of 100 Hz) [23]. A peak current of 100 mA was achieved at the duty factor of 1% (a beam pulse length of 1 ms and a repetition of 10 Hz). The first 9-cell of the DTL was power-tested up to the duty factor of 20% and 50% with the field gradients of 2 MV/m and 1.7 MV/m, respectively. The joint effort will realize highly stable RFQ and DTL with a high duty of 15% for the Phase II.

3.3 High-Energy Linac

The annular-ring coupled structure (ACS) first realized in KEK [24,25] was ready for room-temperature, high-energy linac structure. The ACS is characterized by the balanced performance: its shunt impedance and coupling are comparable to those of the widely-used side-coupled structure, while it has an axially symmetry which may be important regarding the minimization of halo formation [25].

The SC cavities for the proton linac have been intensively developed by the JAERI/NSP group [10] in close collaboration with the SC linear collider group [15] in KEK. Among various accomplishments of this R&D program, it is emphasized that the world-highest accelerating field gradient of 8.8 MV/m (the maximum surface field of 44 MV/m) has been obtained for a $\beta = 0.5$ structure [10]. In particular, the electropolishing technique [15] developed and mass-used for the KEK/TRISTAN was fully utilized for this accomplishment.

It is true that the pulse-mode operation of the SC cavities loses one of the most important advantages regarding energy savings [13]. However, the pulse length for the Joint Project is sufficiently long for making the SC and NC options competing. Then, the other advantages of the SC option are appreciated [13]: the higher field gradient, the higher stored energy and the larger bore radius. We consider that the reliability problem so far existing in the SC technology has been mostly solved by recent intensive efforts, including the above development. In particular, the recent development of the high-power input coupler for the SC cavities should be emphasized [26].

The most serious issue is how to overcome the problems associated with the pulse operation of the SC cavities, such as microphonic vibration problem and phase/amplitude control of the accelerating field. The extremely high accuracy required for the phase/amplitude control in the high-power proton linac in comparison with that for electron accelerators is very difficult to obtain for the pulse operation under the heavy beam loading.

3.4 Other Accomplishments

In addition to the above accomplishments, the linac group has been developing the following items:

- 1) A volume-production type H⁺ ion source, which generates a peak current of 16 mA with a normalized 90% emittance of 0.5π mm-mrad without cesium [21]. For the NSP linac a H⁺ ion peak current of 40 mA was obtained with a current density of 80 mA/cm² and a duty factor of 5% (1ms pulse duration) with Cesium seeded [27].
- 2) A newly optimized low-energy beam transport (LEBT) made of two solenoids [21]. The optimization work was based upon careful three-dimensional analyses of various LEBT schemes, while carefully taking into account the geometrical aberration. The beam experiment showed that a very strong space-charge neutralization effect maintained the high brightness throughout the LEBT.
- 3) Separated DTL (SDTL) [28] after around 50 MeV. Its idea is based upon the fact that quadrupole magnets (QM's) are not necessary in every drift tube (DT) after 50 MeV. By taking the QM's outside the DT's, that is, outside of the tank, we can optimize the geometrical shapes of the DT's in order to maximize the shunt impedance. The shunt impedance of SDTL is by 40 to 65 percent higher than that of a conventional DTL with the same frequency.
- 4) RF chopper after the 3-MeV RFQ. The chopping is one of the most difficult items to be developed. At present a chopping system has been designed which is compatible with a beam loss of 1 percent in the linac [29].

The ring group has been developing the following items:

- 1) Transition-free lattice for the 50-GeV main synchrotron [3],
- 2) 50-GeV synchrotron magnet power supplies [2,3],
- 3) RCS magnet power supplies [2], and
- 4) ceramics vacuum chambers for the RCS.

The imaginary transition γ (γ_i), that is, negative-momentum compaction factor (α), should be realized in order to make the ring free of the transition. The imaginary γ_i is a unique feature of the lattice for the 50-GeV main ring. The synchrotron oscillation, the frequency of which is proportional to the square root of the slippage factor (η), loses stability at $\eta = 0$, resulting in beam loss. The beam energy and the value of γ which make η vanish are referred to as the transition energy and transition γ (γ_t), respectively. Since α is proportional to an orbit integral of the dispersion function divided by the bending radius (ρ), we can obtain a negative α if the dispersion function can be made negative at some of the bending magnets. Among various methods, we have chosen the missing-bend method rather than beta-function modulation, which is fairly harmful in any case.

The magnet power supplies of the 50-GeV synchrotron will use insulated gate bipolar transistors (IGBT), the gating time of which is so fast and flexible as to avoid a harmful reactive (wattles) power. This is also a long-awaited device, but it is only recent that high-power devices (3.3 kV, 1200 A) have been successfully developed. Since the development is still continuing, we are expecting that the devices can be mass-used for our power supplies.

Three families of the magnets of the RCS respectively driven through three resonant networks need precise amplitude and phase controls in order to synchronously operate three systems. Two prototypes of the resonant

networks have been fabricated and tested. They were successfully in phase within 1 mrad, which corresponds to 0.01 in the betatron tune difference.

The rapid cycle of 25 Hz of the RCS led us to use a ceramics chamber in order to avoid any harmful effect of the eddy current otherwise induced. The chamber, on the other hand, should RF-shield the beam current by means of copper strips or copper plating, or other. The R&D including the fabrication of the ceramics chamber is in progress.

4 Conclusion

The high-power proton accelerator project is strongly supported not only by the neutron-science community, but also by many scientific communities. In addition, the ADS is another engineering and industrial field to seriously develop. The Joint Project will effectively cover all of these requirements, thus making itself a very unique project, internationally supported by nuclear physicists and fundamental particle physicists.

On the other hand the user's request stimulated the development of the accelerator technology in such a way that the SC linac feasibility is seriously investigated for the ADS technology. Another example is the RCS, which plays both roles of a booster to the higher-energy synchrotron and a pulsed spallation neutron source. The request for the high-energy, high-intensity RCS stimulated the accelerator group to invent a new type of accelerating cavities. In this way, the Joint Project becomes unique also from the viewpoint of accelerator technology. It will present an accelerator test bench in order to determine which is more promising, RCS or SR, for higher power proton accelerators.

References

- [1] M. Mizumoto et al., Proc. 1st Asian Part. Accel. Conf., 5A001-309 (1998).
- [2] M. Mizumoto et al., "A High Intensity Proton Linac Development for the JAERI Neutron Science Project", Proc. 1998 Linac Conf., TU1004 (1998).
- [3] N. Ouchi et al., "Development of Superconducting Cavities for High Intensity Proton Accelerator at JAERI", Proc. 1998 Applied Superconducting Conf. (1998).
- [4] JHF Project Office, "Proposal for Japan Hadron Facility," KEK Report 97-3 (JHF-97-1).
- [5] JHF Project Office, "JHF Accelerator Design Study Report" KEK Report 97-16 (JHF-97-10).
- [6] Y. Mori, Proc. 1997 Part. Accel. Conf., 920 (1997).
- [7] Y. Yamazaki, Proc. 1st Asian Part. Accel. Conf., 5A002-314 (1998).
- [8] T. Kato, KEK Report 96-17 (1997).
- [9] Y. Yamazaki and T. Kato, Proc. 1998 Linac Conf., TU4011 (1998).
- [10] Y. Mori, Proc. 1st Asian Part. Accel. Conf., 5D001-375 (1998).
- [11] Y. Kaneko, "The Intense Proton Accelerator Program," Proc. the 2nd International Symposium on Advanced Nuclear Energy Research, Mito, p. 25 (1990).
- [12] M. Mizumoto, Proc. 1994 Linac Conf., 317 (1994).
- [13] Y. Yamazaki, Proc. 1996 Linac Conf., 592 (1996).
- [14] Y. Yamazaki, "Accelerator Development for the Japanese Hadron Project and Continuous-Beam, Superconducting Proton Linac", Proc. Workshop for JAERI Proton Technology Center Project, KEK Preprint 95-64 (1995) (in Japanese).
- [15] E. Kako et al., "Improvement of Cavity Performance by Electropolishing in the 1.3 GHz Nb Superconducting Cavities", Proc. 1999 Part. Accel. Conf., THAL6 (1999).
- [16] C. Ohmori et al., "High Field-Gradient Cavities Loaded with Magnetic Alloys", Proc. 1999 Part. Accel. Conf., THAL1 (1999).
- [17] R. Muramatsu et al., "The First Beam Acceleration Test using High Gradient Cavity at HIMAC", Proc. 1999 Part. Accel. Conf., MOP59 (1999).
- [18] M. Fujieda et al., "Magnetic Alloy Loaded RF Cavity for Barrier Bucket Experiment at the AGS", Proc. 1999 Part. Accel. Conf., MOP81 (1999).
- [19] J. Alonso, "The Spallation Neutron Source Program", Proc. 1999 Part. Accel. Conf., FRA01 (1999).
- [20] K. Bongardt et al., Proc. 5th European Part. Accel. Conf., 158 (1996).
- [21] A. Ueno et al., Proc. 1996 Linac Conf., 293 (1996).
- [22] A. Ueno and Y. Yamazaki, Nucl. Instr. Meth. A300, 15 (1990).
- [23] K. Hasegawa et al., "Development of a High Intensity RFQ at JAERI", Journal of Nuclear Science and Technology, 34, 622 (1997).
- [24] T. Kageyama et al., Part. Accel. 32, 33(1990)
- [25] T. Kageyama et al., Proc. 1992 Linac Conf., 456 (1992)
- [26] S. Mitsunobu et al., "High Power Test of the Input Coupler for KEKB SC Cavity", Proc. 7th Workshop on RF Superconductivity, 735 (1995).
- [27] H. Oguri et al., "Development of an Injector Section for the High Intensity Proton Accelerator at JAERI", Proc. 1998 European Part. Accel. Conf., (1998), and H. Oguri et al., "Development of a H⁻ Ion Source for the High Intensity Proton Linac at JAERI", to be published in Proc. the 8th International Conference on Ion Sources, 1999, Kyoto, .
- [28] T. Kato, KEK Report 92-10 (1992).
- [29] T. Kato and S. Fu, "MEBT Design for the JHF 200-MeV Proton Linac", Proc. 1998 Linac Conf., MO4012 (1998).